

# ~~FERRO~~ ~~CONCEPTS~~



# Banger Pocket | Table of Contents

Product Overview .....	1
Banger Pocket Installation .....	2-5
Small Radio Configuration .....	6-8



Banger Pocket (Front)



Banger Pocket (Back)



# Banger Pocket | Product Overview

The Banger Pocket provides an effective solution for carrying flashbangs, smoke grenades, and more. Utilizing an adjustable retention flap that attaches via hook and loop, the Banger Pocket has a ton of room to fit a wide variety of items. Just like our Back Panel Banger, this pocket utilizes our silent tuck tab system which spares you from the noise of Velcro/snaps. Lastly, there is an internally routed length of shock cord to cinch the pocket down, keeping the contents secure.

## Features:

- Adjustable Retention Flap and Closure
- Removable Retention Flap
- Adjustable silent tuck tab for quietly opening and closing
- Internally routed shock cord for width adjustment
- Holds CTS Model 7290/M, CTS 8210, CTS 6210-R, Liberty Dynamics flashbang, and similar sized items
- 1x2 MOLLE
- Made in USA

## Components:

- Banger Pocket
- Retention Flap
- Silent Tuck Tab with Shock cord



Retention Flap  
and Silent Tuck Tab



Banger Pocket

# Banger Pocket | Installation

## Retention Flap



1. Insert Retention Flap into the Banger Pocket evenly attaching Velcro hook to the interior pocket Velcro loop.



2. Place the item into the Banger Pocket and adjust the Retention Flap ensuring the crown aligns with the top of the item.

# Banger Pocket | Installation

## Retention Flap



3. Bring Retention Flap overtop of the item and verify crown is aligned evenly. The crease of the Retention Flap should be centered with the item.



4. Thread shock cord through the holes on the Retention Flap.

# Banger Pocket | Installation

## Retention Flap



5. Tie an overhand knot. Keep the knot loosely tied for retention adjustment.




6. Insert Silent Tuck Tab into the slot on the front of the Banger Pocket. Test retention and adjust shock cord if needed.

## Banger Pocket | Installation

### Retention Flap



7. After the retention is set, tuck the overhand knot behind the slot on the Retention Flap.

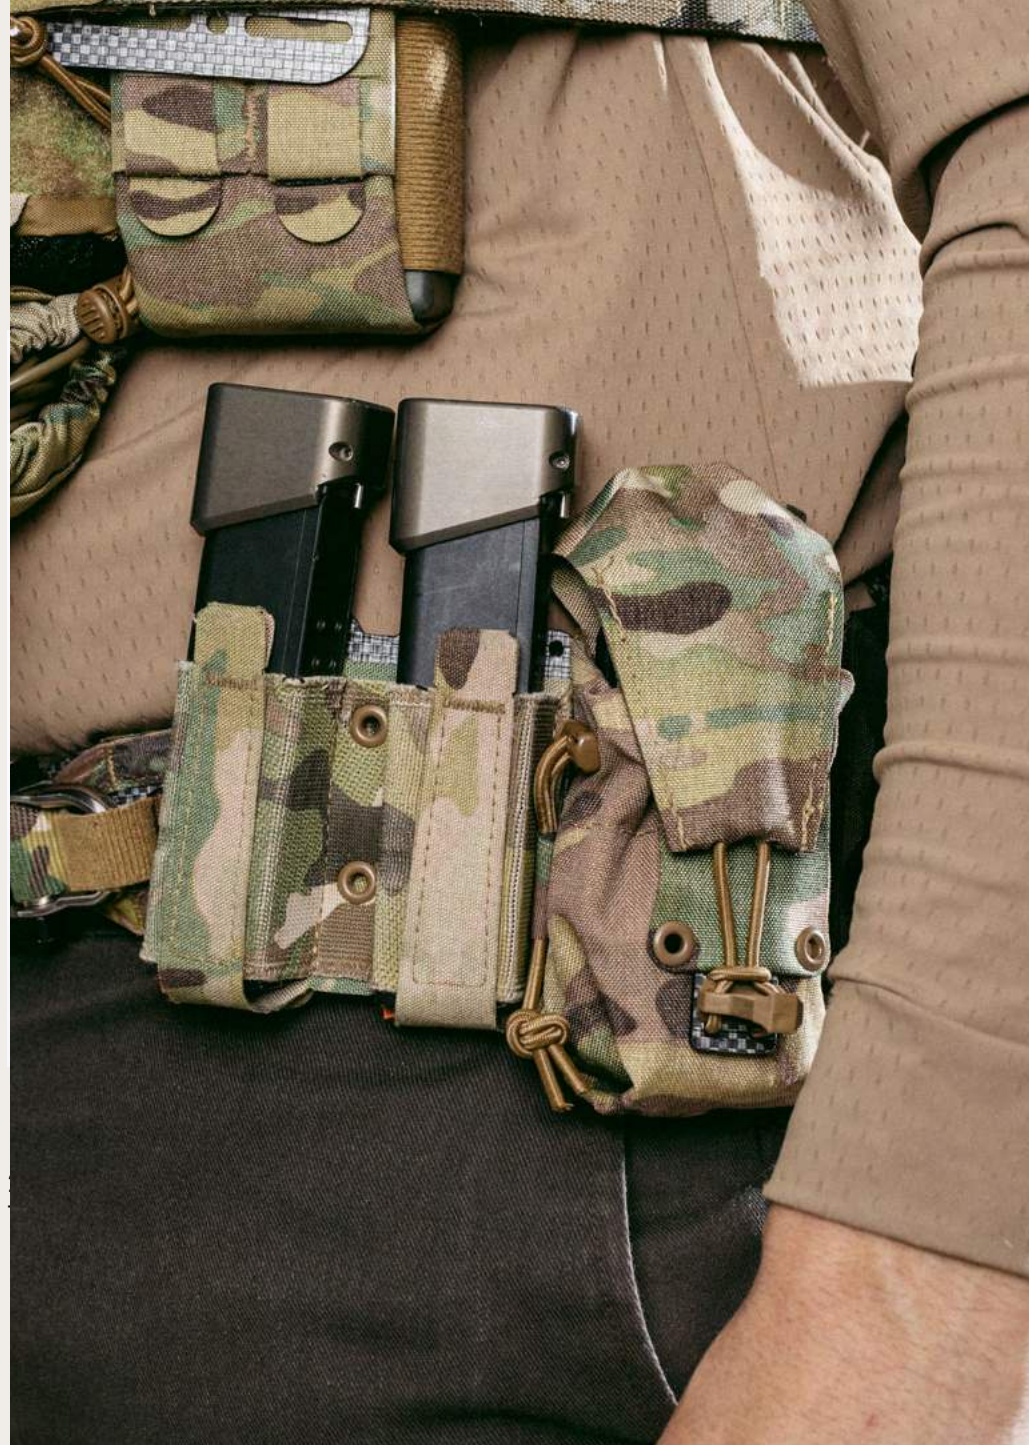



## Banger Pocket | Small Radio Configuration



1. The Banger Pocket can be reconfigured into a small radio pocket by removing the Retention Flap and using the Silent Tuck Tab.



2. Weave the MOLLE strap through the back of the Banger Pocket and insert the MOLLE tuck tab into the bottom row of the Banger Pocket.

## Banger Pocket | Small Radio Configuration



3. Thread one end of the shock cord through the MOLLE strap.



4. Tie an overhand knot and center knot under the MOLLE strap. Keep the knot loosely tied for retention adjustment.

## Banger Pocket | Small Radio Configuration



5. Insert Silent Tuck Tab into the slot on the front of The Banger Pocket. Test retention and adjust the shock cord if needed.



6. After retention is set, use the cord lock and internal shock cord to cinch and secure the item.